

EN



**SIGMA  
PRISMA  
LOW BODY  
CONCEALED**



**EURAPO**



INTEGRATED  
COMFORT  
SYSTEMS



**EST (Energy Saving Technology)** is applied to the EURAPO fan coil units and cassette units. It permits to obtain extremely low electrical absorption and a continuous modulation of the air flow, constantly related to the concrete need of energy in the room.

**EST** technology is composed by a brushless motor combined to a dedicated electronic device (inverter), managed by specific regulators developed by **EURAPO**.

In comparison to the traditional units equipped with asynchronous three-speed-motors, the fan coil and cassette units with brushless motors can obtain a considerable **energy saving**, by reducing the power consumption **up to 70%**.

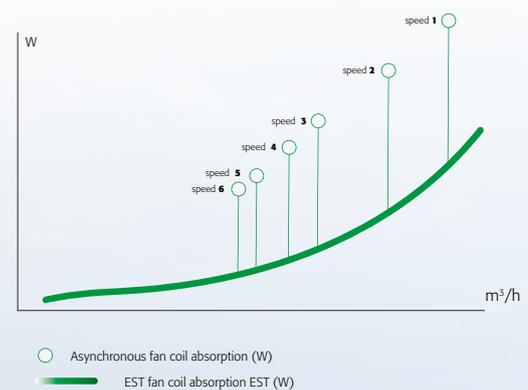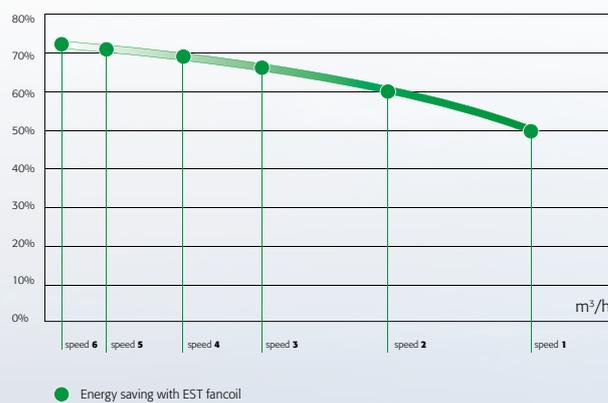

Thanks to the step-less modulation of the fan speeds it is possible to accurately regulate the air volume in a very precise way, in strict relation to the real need of air conditioning in the room. Oscillations in the temperature and relative humidity are reduced at lowest level: a guarantee for the **highest comfort in the room**.

The possibility to reach very low air volumes makes the units extremely quiet at the lowest motor revolutions.

**EST** technology is designed in particular for offices, hospitals, nursing homes and hotels.

It is available for the **EURAPO** range of fan coil units, cassette units and ducted units.

**The EST technology** consists of a brushless motor combined to a dedicated electronic device (inverter), managed by specific regulators. The controller uses a modulating signal with 0-10Vdc tension in order to regulate the fan speed.

**The brushless electric motor** is composed by a rotor having permanent magnets, whose magnetic fields interact with the ones produced by the stator winding.

The transfer of current is no longer by mechanical commutation (sliding contacts) but by an electronic commutation system: an electronic controller (inverter) powers the motor's stator and generates rotating magnetic fields, that determine the rotor's speed.



For applying the EST technology also to the ducted units, the inverter is provided with DIP SWITCHES that can be also set on site, during start-up of the unit. This high flexibility grants the proper configuration for every kind of installation, by personalization of the Dip Switches accordingly to the pressure drop in the system.

Brushless motors develop much less heat than the traditional brushed motors and they have much lower mechanical resistance than the standard asynchronous ones. They offer several advantages, like as higher efficiency, longer lifetime, less need of maintenance. The absence of brushes eliminates also the main source of electromagnetic noise.

By giving a 0-10Vdc signal to the inverter, an electronic regulator intervenes by simply managing the fan speed and the rotor's torque in a continuous way, adapting with extreme precision the air volume to the real and punctual requirements in the room.

For managing all units equipped with brushless motors, EURAPO developed a new microprocessor control, available both built-in the unit (EDCL) and for remote installation on the wall (EDCR).

Also the OMNIBUS digital system has been implemented in order to be combined to the EST technology: the new cards for fan coil units (OBV10) and for cassette units (OBU10) can be connected to the new OMNIBUS consoles, designed for managing fan coil and cassette units with brushless motors. The consoles are available for on-wall installation (ODC236), fitted in the fan coil unit or for built-in the wall installation, on 503 modules (ODC235 white colour and ODC245 black colour).

OMNIBUS regulators give the possibility to fully control the fan speed (0-100%) and/or to manually select three fan steps (high, med and low speed): it is actually possible to set in every moment and very easily the three different levels of motor's rotation, in order to fulfil specific thermal or acoustical requirements.

## FEATURES

- 0-10Vdc control signal
- Low mechanical resistance and low overheating
- Wide range of fan speed regulation, especially at the lowest revolutions
- Continuous regulation of the fan speeds (0-100%)
- Possibility to manually set the desired three fan steps (by using OMNIBUS regulators)
- Available for Sphera, Sigma, Prisma, Low Body, Concealed fancoil units, UCS600 and UCS900 cassette units, EBH and EDS ducted units

## ADVANTAGES

- Energy saving: electrical absorption reduced up to 70%
- Higher efficiency: possibility to adapt the air volume and the capacities accordingly to the real room loads
- Higher comfort: reduced oscillation of the temperature and relative humidity in the room
- Extremely quiet functioning of the unit, thanks to the operation at low revolutions
- Reduced wearing and higher reliability
- Longer expected lifetime of the motor

FAN COIL



## SIGMA

FANCOIL UNIT



**Fancoil unit with housing,  
for heating and cooling applications,  
2 and 4 pipes, capacity from 0,62 kW a 13,26 kW.**

Sigma fancoil unit is compatible with every kind of environment. It is versatile in the different applications, discreet in the lines, reliable in the performances.

This fancoil designed by Eurapo, holds in high regard the harmony and linearity of units and is compatible with every kind of environment thanks to its configuration variety: it can be installed on the floor, thanks to firm feet and with frontal suction, or mounted on the ceiling in both configurations.

The Sigma housing, with upper air outlet, is manufactured with sheet steel and painted with oven dried epoxy powders, available in all RAL colours. Access doors and grilles are made of heat-resistant ABS and can be turned into all four directions, in white colour.

Important part: the filter is totally retractable and easily accessible; it is particularly strong and wear and tear resistant. It needs short time for routine maintenance.

In order to make Sigma fancoil more complete, Eurapo offers a large range of kit accessories, from the simple electromechanical regulations and on/off valves to the advanced systems with modulating valves and digital Bus management.

Sigma units are also available for **District Cooling** applications: the water coils are designed with a reduced number of circuits, suitable for functioning with high water temperature difference.



## PRISMA

**Fancoil unit with housing,  
for heating and cooling applications,  
(only PV and PV/AF),  
2 and 4 pipes, capacity from 0,62 kW to 3,95 kW.**

Prisma fancoil unit has an original shape. The housing itself is a piece of furniture, it is made of painted metal sheet with side flaps and grilles made of ABS, which are adjustable in all four directions.

This fancoil is designed by Eurapo to be compatible with every kind of environment, thanks to its configuration variety: it can be easily installed on the floor, thanks to firm feet, or mounted on the ceiling. In both configurations the air intake can be located on the bottom or front side.

The Prisma housing, with upper air outlet, is manufactured with sheet steel and painted with oven dried epoxy powders, available in all RAL colours.

Access doors and grilles are made of heat-resistant ABS and can be turned into all four directions, in white colour. One important component is the filter, which is totally retractable but easily accessible; it is particularly strong and wear resistant and needs very short time for routine maintenance.

In order to make Prisma fancoil more complete, Eurapo offers a large range of accessories, from the simple electromechanical regulations and on/off valves to the advanced systems with modulating valves and digital Bus management.

FAN COIL



## LOW BODY



**Fancoil with reduced height,  
for heating and cooling operation,  
for 2 and 4 pipe system, capacity from 0,48 kW to 3,75 kW.**

The LOW BODY fancoils are characterized by a very reduced height (only 427 mm) and they have been designed for installation in small niches.

The LOW BODY units present an upper air outlet and a frontal air intake; they can be installed on the floor, on the wall, or concealed.

The low body fancoils are available in 5 sizes and they are always equipped with an auxiliary drain pan.

The inner frame is made of galvanized steel, the housing is manufactured with sheet steel painted with oven dried epoxy powders in all RAL colours available (standard colour is RAL9003), access doors and grilles are made of white colour heat-resistant ABS and can be turned into all four directions.

To complete all models Europro offers a wide range of accessories.

FANCOIL UNIT



## CONCEALED UNIT



**Fancoil without casing,  
for heating and cooling operations,  
for 2 and 4 pipe system, capacity from 0,62 kW to 13,26 kW.**

The concealed fancoil is a unit which can be used for ductwork installations: it has very good performances also with medium/long ducts; it is silent and can be equipped with a wide range of dedicated accessories. The concealed fancoil is available for vertical installation on the wall (with bottom air intake) or on the floor (with frontal air intake) and horizontal on the ceiling (with back or bottom air intake).

This fancoil is the ideal solution for the needs of small spaces and limited sizes that nowadays influences the choice of furniture in homes or offices.

Available in 10 sizes, the concealed model is supplied equipped with an electric box containing the terminal board and auxiliary drain pan. The frame is made of galvanized steel and the inner sides are completely lined by an insulating self-extinguishing material.

To complete this model Eurapo offers a wide range of accessories.

The concealed fancoils are also available for **District Cooling** applications: the water coils are designed with a reduced number of circuits, suitable for functioning with high water temperature difference.

# OMNIBUS

BUILDING MANAGEMENT SYSTEM



Yet designing and producing air conditioning systems comprising selected, reliable components is not sufficient in itself to guarantee high standards of air-conditioned comfort, these also need to be integrated and harmonised with the **intelligence controlling** them.

Only complete synergy between **terminal unit performance** and **heat regulating devices** can guarantee optimum results and meet the most modern requirements in comfort management simply and efficiently.

The **EURAPO-OMNIBUS** Digital System is designed to fully regulate the water terminal units (such as fan coil units, water cassette units, high pressure ducted fan coil units and radiant systems) for domestic use, residential buildings and public rooms.

This controller permits to be easily programmed by the installing company and configured accordingly to each particular type of system.

- Elegant design
- LCD Display
- Touch screen
- Humidity sensor
- Plug & Play connections
- Weekly, daily and monthly programs
- Scenarios configuration
- Compatible with brushless and inverter technology
- Flexible configuration
- Service tool available
- MODBUS RTU: free protocol
- ETHERNET (TCP/IP) compability
- LONWORKS® compatibility
- Different access levels to the Building Management System





INNOVATIVE TOUCH SCREEN DEVICE



**OTOUCH** is a control and supervision system developed by Eurapo Laboratories in order to manage residential comfort. This high tech solution is matched with an easy-to-use graphical interface, which has been designed in cooperation with Udine University in order to guarantee an intuitive and simply comfort control.

**OTOUCH** can functionally fully control air conditioning system devices (such as fan coils units) or radiant systems (such as hydraulic actuators or dehumidifiers) or even both at the same time, following an innovative idea of control philosophy. Its distinctive feature consists of being able to monitorize and control all functions of fan coils units together with the capability of interacting and integrating different HVAC system devices in the same control panel.



**OTOUCH** can control:

- Cooling and heating units (chillers/boilers)
- HVAC system pumps
- Mixing valves (for radiant systems)
- Thermal zone valves
- Dehumidifiers
- Fan coil units



# SIGMA

mod. SH



mod. SH/AF




mod. SV




mod. SV/AF



mod. SV

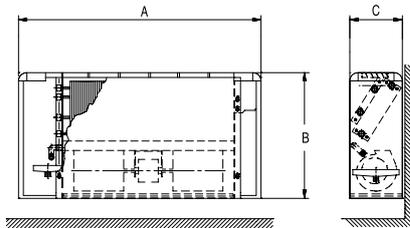

mod. SH/AF

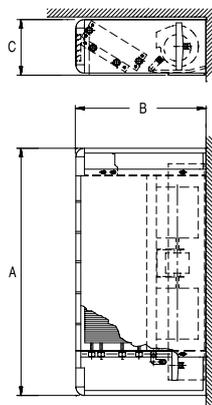

# PRISMA

mod. PH



mod. PH/AF




mod. PV




mod. PV/AF



mod. PV

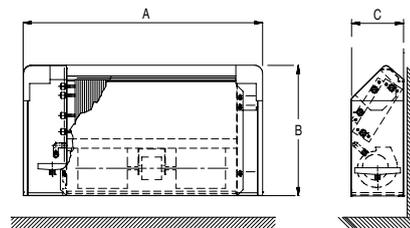

mod. PH/AF

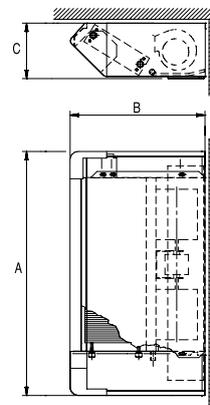

Dimensions (mm) and weight for SV - SV/AF - SH - SH/AF

	110	112	114	216	218	220	222	224	226	328
<b>EST</b>	-	512	514	516	-	520	522	524	-	528
<b>A</b>	648	773	898	1023	1148	1273	1273	1523	1523	1773
<b>B</b>	538	538	538	538	538	614	614	614	614	614
<b>SV - SH</b>										
<b>C</b>	224	224	224	224	224	254	254	254	254	254
<b>Kg</b>	18	20	23	28	31	41	44	52	52	58
<b>SV/AF - SH/AF</b>										
<b>C</b>	233	233	233	233	233	263	263	263	263	263
<b>Kg</b>	19	21	24	30	32	43	46	54	54	61

Hydraulic connection 1/2" G F

Dimensions (mm) and weight for PV - PV/AF - PH - PH/AF

	110	112	114	216	218
<b>EST</b>	-	512	514	516	-
<b>A</b>	648	773	898	1023	1148
<b>B</b>	560	560	560	560	560
<b>PV - PH</b>					
<b>C</b>	226	226	226	226	226
<b>Kg</b>	17	20	23	27	31
<b>PV/AF - PH/AF</b>					
<b>C</b>	235	235	235	235	235
<b>Kg</b>	18	21	24	28	32



Hydraulic connection 1/2" G F

# LOW BODY



mod. CVR

mod. SVR

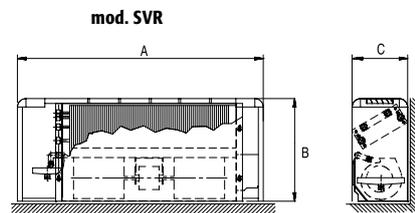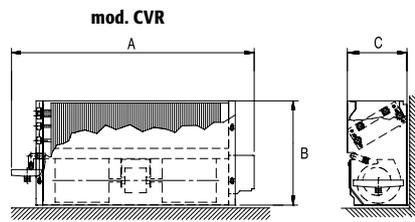

Dimensions (mm) and weight CVR

	110	112	114	216	218
<b>EST</b>	-	<b>512</b>	<b>514</b>	<b>516</b>	-
<b>A</b>	555	680	805	930	1055
<b>B</b>	395	395	395	395	395
<b>C</b>	230	230	230	230	230
<b>Kg</b>	9	11	14	16	19

Hydraulic connection 1/2" G F

Dimensions (mm) and weight SVR

	110	112	114	216	218
<b>EST</b>	-	<b>512</b>	<b>514</b>	<b>516</b>	-
<b>A</b>	648	773	898	1023	1148
<b>B</b>	430	430	430	430	430
<b>C</b>	254	254	254	254	254
<b>Kg</b>	15	17	22	23	26

Hydraulic connection 1/2" G F

# CONCEALED





mod. CH

mod. CH/AF

mod. CV

mod. CV/AF

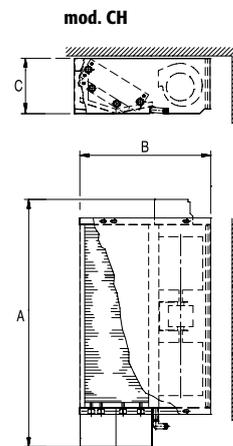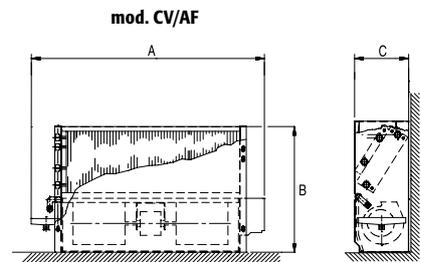

Dimensions (mm) and weight for CV - CV/AF - CH - CH/AF

	110	112	114	216	218	220	222	224	226	328
<b>EST</b>	-	<b>512</b>	<b>514</b>	<b>516</b>	-	<b>520</b>	<b>522</b>	<b>524</b>	-	<b>528</b>
<b>CV - CV/AF</b>										
<b>A</b>	555	680	805	930	1055	1180	1180	1430	1430	1680
<b>CH - CH/AF</b>										
<b>A</b>	574	699	824	949	1074	1199	1199	1449	1449	1699
<b>CV - CV/AF - CH - CH/AF</b>										
<b>B</b>	505	505	505	505	505	581	581	581	581	581
<b>C</b>	215	215	215	215	215	245	245	245	245	245
<b>Kg</b>	10	13	16	19	22	29	31	38	38	42

Hydraulic connection 1/2" G F

## GENERAL FEATURES

The **inner frame** is completely lined with self-extinguishing thermal insulation material. The sides have a special structure near the coil connections in order to avoid the pipes deformation while connecting the unit to the system (antitorsion structure).

The **insulation** is placed over all the critical parts of the unit to avoid any condensate risk. The insulated condensate tray can be taken apart independently of the other components. All the units are always provided with an auxiliary drain pan to be fixed under the water connections.

**ATTENTION:** *all the models are suitable for heating and cooling operations, except PH and PH/AF models, suitable only for heating*

The **coil** consists of aluminium fin packs and mechanically expanded copper tubes; each header is provided with a very handy air valve. Testing pressure 30 bar, operating pressure 16 bar. 2 and 3 row coils are available for all models, 4 row coils for all models except PRISMA and LOW BODY, 3 rows direct expansion coils are available for all models, except PH and PH/AF.

For 4 pipes installations, an additional 1-row coil for heating mode can be added (see Accessories). Sizes 220+328 and 520+528 are also available with **District Cooling** coils, designed with a reduced number of circuits, suitable for functioning with high water temperature difference.

**Standard water connections are on the right side of the unit**, facing the air outlet; however the coils can be easily removed and reversed on site. All water connections are 1/2" G (female threaded).

The **fan deck** consists of a centrifugal fan, one (110+114 sizes), two (216+226) or three (size 328) aluminium impellers, directly splined to the motor shaft, and galvanized steel scrolls; it can easily be removed, independently of the inner frame, making control, maintenance and replacement very simple. Each fan assembly is dynamically balanced to achieve excellent sound performances.

The asynchronous **motor** is single phase, with permanently connected capacitor and thermal protection of the windings. It is provided with 6 speeds, 3 of them factory wired as standard; the others can easily be used when there are special plant requirements. In **EST** version, the motor is combined to an inverter and it is managed by a modulating signal 0-10Vdc.

The **electric panel** is contained inside a box made of insulating material and fixed on the left side of the inner frame; it can easily be removed and shifted from the left to the right side when the coil connections are reversed. For concealed and horizontal units remote controllers can be provided (on request).

The **housing** is manufactured with sheet steel and painted with oven dried epoxy powders. Standard colour is RAL 9003 (white) for SIGMA, PRISMA and LOW BODY series.

**On request, other colours can be provided.**

Vertical models, with upper air outlet and bottom air intake (SV-PV-CV) or frontal (SV/AF-PV/AF-CV/AF-SVR-CVR) can be installed on the wall or on the floor (with a set of feet for SV and PV).

Horizontal models, for ceiling installation, have a frontal air outlet and a rear (SH-PH-CH) or bottom (SH/AF-PH/AF-CH/AF) air intake.

The standard **grilles** are independent and can be turned into all 4 directions without any tool. They are in self-extinguishing ABS.

**Access doors** are in the same colour and material of the grilles.


The **air filter** consists of a metal frame enclosing the filter element (a polypropylene net). In order to have better fancoil performances, **it is suggested to keep the filter properly clean**, by washing it with soap and water and drying in open-air.

## ACCESSORIES



### BA1

Additional 1 row coil for hot water, for 4-pipes systems. It can be added to units with a 2 or 3 row coils. Not available for PH and PH/AF models.



### BA41

Additional 1 row coil for hot water, for 4-pipes systems. It can be added to units with a 4 row coils. The thickness is of 60 mm and it is available for CONCEALED series.



### KRE

Electric heater supplied with safety thermostat and power relay. Not available with 4 row coils. For PRISMA and LOW BODY series, it is available only with 2 row coils.



### TM

Minimum water temperature thermostat. During heating operation, it prevents the fan from starting if the coil temperature has not reached the set point temperature.



### CP

Set of painted steel feet (same colour as the casing), or with the frontal grille (ZL).



### PM

Air delivery plenum made of galvanized steel sheet, provided with circular or rectangular spigots for the connection to the air duct.



### PC

The condensate pump is necessary when the natural water discharge is not allowed.



### Not Standard Colour

Special colour of the housing, available in all RAL range.



### Valves

EURAPO is able to offer several kinds of valves (ON/OFF and modulating) in order to have the best solution for any need regarding the water flow regulation.

## CONTROLS



### CMR00

Remote room temperature thermostat, suitable for the selection of the main functions of the unit: type of ventilation, fan speed selection, Summer/Winter switch and room temperature control.



### CER20-CER30

Microprocessor electronic controls for the automatic selection of the main functions of the unit, available in several configurations.



### EDCL-EDCR

Remote microprocessor control, built-in the unit or "on wall" installation, designed for water terminal units equipped with Brushless motors (EST Inverter Technology).

It permits to control the type of ventilation, the fan speeds, Summer/Winter switch and room temperature thermostat.



### OC236/ODC236

#### Display console

Elegant device that permits to set all working parameters (set point, speed, status, etc.). It can also be used as diagnosis instrument, thanks to the parameters visualisation and modification.

Compatible with the Supervision System.



### OC736/ODC736

#### Analog Plus console

Elegant and simple console for the setting of the temperature set point, the functioning of the fancoil unit, the S/W changeover and the speed selection. Compatible with the Supervision System.

## TECHNICAL DATA (3 rows - EST)

		512	514	516	520	522	524	528		
<b>Cooling</b>	Air temperature 27 °C d.b., 19 °C w.b. Water temperature 7/12 °C	Total cooling capacity [kW]	MAX	1,98	2,56	3,81	5,05	5,81	7,47	9,18
			MED	1,43	1,81	2,53	3,86	4,42	5,64	6,94
			MIN	0,74	0,93	1,51	2,72	3,05	4,07	4,89
		Sensible cooling capacity [kW]	MAX	1,65	2,12	3,14	3,79	4,32	6,09	7,51
			MED	1,16	1,48	2,01	2,78	3,16	4,42	5,50
			MIN	0,54	0,78	1,21	1,92	2,11	3,13	3,74
		Water flow [l/h]	MAX	341	441	656	869	1000	1286	1580
			MED	246	312	435	664	761	971	1194
			MIN	127	160	260	468	525	701	842
		Pressure drop [kPa]	MAX	9,6	9,2	14,6	16,9	36,2	16,8	31,3
			MED	5,4	4,8	8,5	10,6	22,0	10,0	18,5
			MIN	1,7	1,6	3,9	5,6	11,1	5,5	9,7
<b>Heating 2 pipes</b>	Air temperature 20 °C Water inlet temperature 45/40 °C	Heating capacity [kW]	MAX	2,05	3,04	4,40	5,76	6,53	8,43	10,40
			MED	1,47	2,18	3,05	4,44	4,84	6,22	7,67
			MIN	0,78	1,15	1,87	3,11	3,37	4,50	5,38
		Water flow [l/h]	MAX	353	523	757	991	1124	1451	1790
			MED	253	375	525	757	833	1071	1320
			MIN	134	198	322	535	580	775	926
		Pressure drop [kPa]	MAX	10,8	10,3	17,3	21,8	40,0	17,2	32,2
			MED	6,0	5,5	8,6	13,0	23,5	9,8	18,0
			MIN	2,0	2,0	4,2	6,6	11,5	5,3	9,0
<b>Heating 4 pipes</b>	Air temperature 20 °C Water temperature 65/55 °C	Heating capacity [kW]	MAX	1,84	2,39	3,20	5,00	5,55	6,46	7,90
			MED	1,37	1,76	2,40	4,12	4,35	5,19	6,30
			MIN	0,87	1,09	1,77	3,22	3,29	4,09	4,94
		Water flow [l/h]	MAX	158	206	275	430	478	556	680
			MED	118	151	207	355	374	447	542
			MIN	75	94	152	277	283	352	425
		Pressure drop [kPa]	MAX	4,7	9,3	15,6	23,3	21,5	36,0	46,2
			MED	2,8	5,4	11,0	15,9	14,0	24,2	30,7
			MIN	1,2	2,4	5,6	9,8	7,7	15,4	19,5
<b>Further data</b>	Air volume [m <sup>3</sup> /h]	MAX	456	574	792	1082	1304	1567	1995	
		MED	298	373	489	757	904	1080	1370	
		MIN	138	170	287	504	568	715	876	
	Sound power level [dB(A)]	MAX	55,0	59,0	60,0	57,0	62,0	63,0	69,0	
		MED	44,0	48,0	47,0	48,0	51,0	53,0	59,0	
		MIN	29,0	29,0	33,0	37,0	39,0	43,0	48,0	
	Sound pressure level [dB(A)] (1)	MAX	45,6	49,6	50,6	47,6	52,6	53,6	59,6	
		MED	34,6	38,6	37,6	38,6	41,6	43,6	49,6	
		MIN	20,5	20,5	23,6	27,6	29,6	33,6	38,6	
	Power input [W] (2)	MAX	31	54	42	46	76	89	168	
Absorbed current [A] (2)	MAX	0,35	0,44	0,42	0,42	0,68	0,83	1,42		
Water content [l]		0,79	1,05	1,31	2,20	2,20	2,84	3,47		

(1) Sound pressure level, in a 100 m<sup>3</sup> room, 1.5 m distance and reverberating time of 0.3 s.

(2) Electrical supply: 230-1-50/60 [V-ph-Hz].



Euroap take part in EUROVENT certification program. Above mentioned models are in the FC section of the website.

### NOTE

Performances of LOW BODY models are about 11% lower than the standard ones in heating operation and 12,3% lower in cooling operation. For greater accuracy please use the EURAPO selection software.

To obtain capacities for 2 or 4 row coils or for **District Cooling** solutions, or for conditions different from standard ones, please use the selection software or contact EURAPO staff.

The printed data could be modified without any notice.

## TECHNICAL DATA (3 rows - asynchronous)

		110	112	114	216	218	220	222	224	226	328		
<b>Cooling</b>	Air temperature 27 °C d.b., 19 °C w.b. Water temperature 7/12 °C	Total cooling capacity [kW]	MAX	1,11	1,59	2,14	3,30	3,50	4,44	5,07	6,43	7,25	9,73
			MED	0,95	1,31	1,88	2,67	2,99	3,68	4,39	5,75	6,67	8,75
			MIN	0,76	1,07	1,57	2,20	2,46	2,94	3,84	4,62	5,50	6,36
		Sensible cooling capacity [kW]	MAX	0,93	1,25	1,90	2,46	3,06	3,53	4,42	5,06	5,70	8,04
			MED	0,78	0,99	1,64	1,95	2,51	2,84	3,74	4,44	5,18	7,15
			MIN	0,61	0,79	1,33	1,56	2,00	2,20	3,20	3,45	4,15	5,03
		Water flow [l/h]	MAX	191	274	368	568	602	764	873	1107	1248	1675
			MED	164	225	324	460	515	633	756	990	1148	1506
			MIN	131	184	270	379	423	506	661	795	947	1095
		Pressure drop [kPa]	MAX	3,4	7,1	5,8	14,8	13,6	24,1	28,4	18,8	21,0	74,6
			MED	2,8	5,0	4,6	12,5	9,8	17,4	21,8	15,5	18,1	61,5
			MIN	2,0	3,4	3,3	8,5	6,7	11,6	17,2	10,5	12,8	30,8
<b>Heating 2 pipes</b>	Air temperature 20 °C Water inlet temperature 45/40 °C	Heating capacity [kW]	MAX	1,37	1,83	2,60	3,46	4,17	5,09	6,04	6,60	7,86	10,54
			MED	1,13	1,46	2,07	2,90	3,51	4,12	5,11	5,84	7,17	9,64
			MIN	0,87	1,14	1,70	2,31	2,83	3,19	4,41	4,58	5,76	6,73
		Water flow [l/h]	MAX	236	315	448	596	718	826	1040	1136	1353	1814
			MED	194	251	356	499	604	670	880	1005	1234	1659
			MIN	150	196	293	398	487	518	759	788	991	1158
		Pressure drop [kPa]	MAX	4,9	6,0	6,5	14,7	16,0	23,4	27,7	18,9	25,3	82,4
			MED	4,6	6,0	5,1	10,5	11,7	16,3	21,1	15,3	21,6	67,7
			MIN	3,0	4,1	4,0	6,9	8,1	10,8	16,4	10,3	14,9	29,7
<b>Heating 4 pipes</b>	Air temperature 20 °C Water temperature 65/55 °C	Heating capacity [kW]	MAX	0,91	1,31	1,93	2,79	3,20	4,33	4,92	6,16	6,30	8,00
			MED	0,83	1,13	1,85	2,40	2,81	3,67	4,33	5,55	5,98	7,43
			MIN	0,71	0,95	1,51	2,06	2,38	2,99	3,84	4,55	5,03	5,83
		Water flow [l/h]	MAX	78	113	166	240	275	373	423	530	542	688
			MED	71	97	159	207	242	316	373	478	515	639
			MIN	61	82	130	177	205	257	330	392	433	502
		Pressure drop [kPa]	MAX	1,3	3,4	6,7	14,7	7,1	10,3	11,7	33,0	31,7	46,5
			MED	1,1	2,6	5,8	10,5	5,7	7,7	9,5	23,0	28,9	40,6
			MIN	0,9	1,8	5,2	9,4	4,0	5,4	7,7	16,3	21,4	24,7
<b>Further data</b>	Air volume [m <sup>3</sup> /h]	MAX	243	317	432	606	754	961	1115	1307	1507	2010	
		MED	181	253	352	488	616	776	928	1106	1318	1687	
		MIN	136	185	279	377	486	594	742	779	986	1107	
	Sound power level [dB(A)]	MAX	48,0	50,0	54,0	53,0	55,0	54,0	60,0	60,0	63,0	67,0	
		MED	42,0	45,0	49,0	47,0	50,0	48,0	56,0	55,0	60,0	63,0	
		MIN	36,0	38,0	42,0	40,0	43,0	40,0	50,0	47,0	53,0	52,0	
	Sound pressure level [dB(A)] (1)	MAX	38,6	40,6	44,6	43,6	45,6	44,6	50,6	50,6	53,6	57,6	
		MED	32,6	35,6	39,6	37,6	40,6	38,6	46,6	45,6	50,6	53,6	
		MIN	26,6	28,6	32,6	30,6	33,6	30,6	40,6	37,6	43,6	42,6	
	Power input [W] (2)	MAX	46	48	57	61	76	90	117	140	162	213	
Absorbed current [A] (2)	MAX	0,21	0,21	0,25	0,27	0,33	0,39	0,52	0,64	0,71	0,95		
Water content [l]		0,53	0,79	1,05	1,31	1,57	2,20	2,20	2,84	2,84	3,47		

(1) Sound pressure level, in a 100 m<sup>3</sup> room, 1,5 m distance and reverberating time of 0.3 s.

(2) Electrical supply: 230-1-50/60 [V-ph-Hz].



Eurapo take part in EUROVENT certification program. Above mentioned models are in the FC section of the website.

### NOTE

Performances of LOW BODY models are about 11% lower than the standard ones in heating operation and 12,3% lower in cooling operation. For greater accuracy please use the EURAPO selection software.

To obtain capacities for 2 or 4 row coils or for **District Cooling** solutions, or for conditions different from standard ones, please use the selection software or contact EURAPO staff.

The printed data could be modified without any notice.



Eurapo Srl  
Via A. Malignani, 12  
33170 Pordenone - Italy  
T +39 0434 572552  
F +39 0434 28667  
info@eurapo.it  
www.eurapo.it



www.eurovent-certification.com  
www.certiflash.com

As programs and technologies are always improving, description, data and drawings must be intended as merely indicative and can be modified without any notice.